

PORTFOLIO™

HOUSING

9"



9" Lens Downlight Metal Halide & HPS ED17

Lens downlight for general lighting when wet location listing is required from a single vertically mounted ED17 high-pressure sodium or metal halide lamps. Optional quartz standby lamp is factory installed to upper reflector. Magnetic ballast ordered separately installs rapidly to ballast bridge with electrical quick connects.

Dimensions	Length	Width	Height	Cutout
Standard Housing	29-5/8"	16-1/2"	11"	10-1/4"



9" Shallow Downlight Metal Halide & HPS ED17

Wide beam downlight for general lighting from a single horizontally mounted ED17 high-pressure sodium or metal halide lamps. Available with wet location listed fresnel or concave prismatic glass lens trims. Optional quartz standby lamp is factory installed to upper reflector. Magnetic ballast ordered separately installs rapidly to ballast bridge with electrical quick connects. Bar hangers provided with housing.

Dimensions	Length	Width	Height	Cutout
Standard Housing	28-7/16"	18"	6"	10-1/4"

HOUSING

M6022T=50W MH Housing
M6023T=70W MH Housing
M6024T=100W MH Housing

M6042T=50W HPS Housing
M6043T=70W HPS Housing
M6044T=100W HPS Housing

OPTIONS

Q=Quartz Restrike System with Time Delay, 100W DC Bayonet Base Quartz Lamp (Included)
X=DC Bayonet Lamp Socket only for Quartz Standby Lamp

BALLAST

620=50W HPS 120/277V Magnetic
630=70W HPS 120/277V Magnetic
638=70W HPS 120/347V Magnetic
640=100W HPS 120/277V Magnetic
648=100W HPS 120/347V Magnetic
720=50W MH 120/277V Magnetic
728=50W MH 120/347V Magnetic
730=70W MH 120/277V Magnetic
738=70W MH 120/347V Magnetic
740=100W MH 120/277V Magnetic
748=100W MH 120/347V Magnetic

ACCESSORIES

HB26=C Channel Bar Hanger, 26" Long, Pair
HB50=C Channel Bar Hanger, 50" Long, Pair
RMB22=Wood Joist Bar Hanger, 22" Long, Pair
HSA9=Slope Adapter for 9" Aperture Housings, Specify Slope
FK_=Field Installed Fuse Kit, Specify Amperage

HOUSING

M6043S=MH and HPS
Shallow Housing

OPTIONS

Q=Quartz Restrike System with Time Delay, 100W DC Bayonet Base Quartz Lamp (Included)
X=DC Bayonet Lamp Socket only for Quartz Standby Lamp

BALLAST

620=50W HPS 120/277V Magnetic
630=70W HPS 120/277V Magnetic
638=70W HPS 120/347V Magnetic
640=100W HPS 120/277V Magnetic
648=100W HPS 120/347V Magnetic
650=150W HPS 120/277V Magnetic
658=150W HPS 120/347V Magnetic

720=50W MH 120/277V Magnetic
728=50W MH 120/347V Magnetic
730=70W MH 120/277V Magnetic
738=70W MH 120/347V Magnetic
740=100W MH 120/277V Magnetic
748=100W MH 120/347V Magnetic

ACCESSORIES

HB26=C Channel Bar Hanger, 26" Long, Pair
HB50=C Channel Bar Hanger, 50" Long, Pair
RMB22=Wood Joist Bar Hanger, 22" Long, Pair
HSA9=Slope Adapter for 9" Aperture Housings, Specify Slope
FK_=Field Installed Fuse Kit, Specify Amperage

TRIM

Regressed Fresnel Lens

100W Max MH or HPS
150W ED17 HPS




TRIM

10002=Regressed Fresnel

FINISH

P=Black Baffle with White Trim Ring
PWH=White Baffle with White Trim Ring

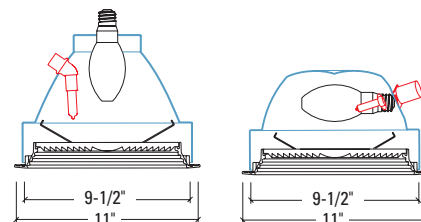

Concave Prismatic Lens

100W Max MH or HPS
150W ED17 HPS




TRIM

10012=Regressed Concave Prismatic Lens

FINISH

P=Black Baffle with White Trim Ring
PWH=White Baffle with White Trim Ring

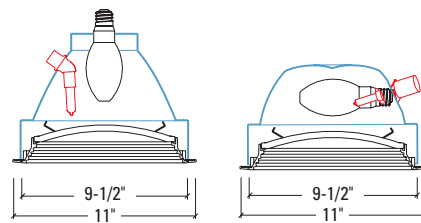

Ordering Example

Housing, Ballast, Trim, Accessories and Lamps ordered as separate line items.

Housing

M6024T

Ballast

740

Trim

10002PWH

Accessories

HB26